



NO.	REVISION	DATE	BY	CHKD.
1	NOTED			
2	REVISED			
3	SEE REVISION NOTICE			
4	NO. 11-A-5096			
5	NO. 11-A-5096			

8-CONNECTOR-573174 (SHOW ON DWG 07C1) (2)  
 OPTIONAL: SPLICE CONDUCTORS  
 AND SOLDER (SEE NOTE 1)  
 (INSULATE AS REQUIRED  
 (SEE NOTE))



WIRING DIAGRAM

NO.	REVISION	DATE	BY	CHKD.
1	NOTED			
2	REVISED			
3	SEE REVISION NOTICE			
4	NO. 11-A-5096			
5	NO. 11-A-5096			

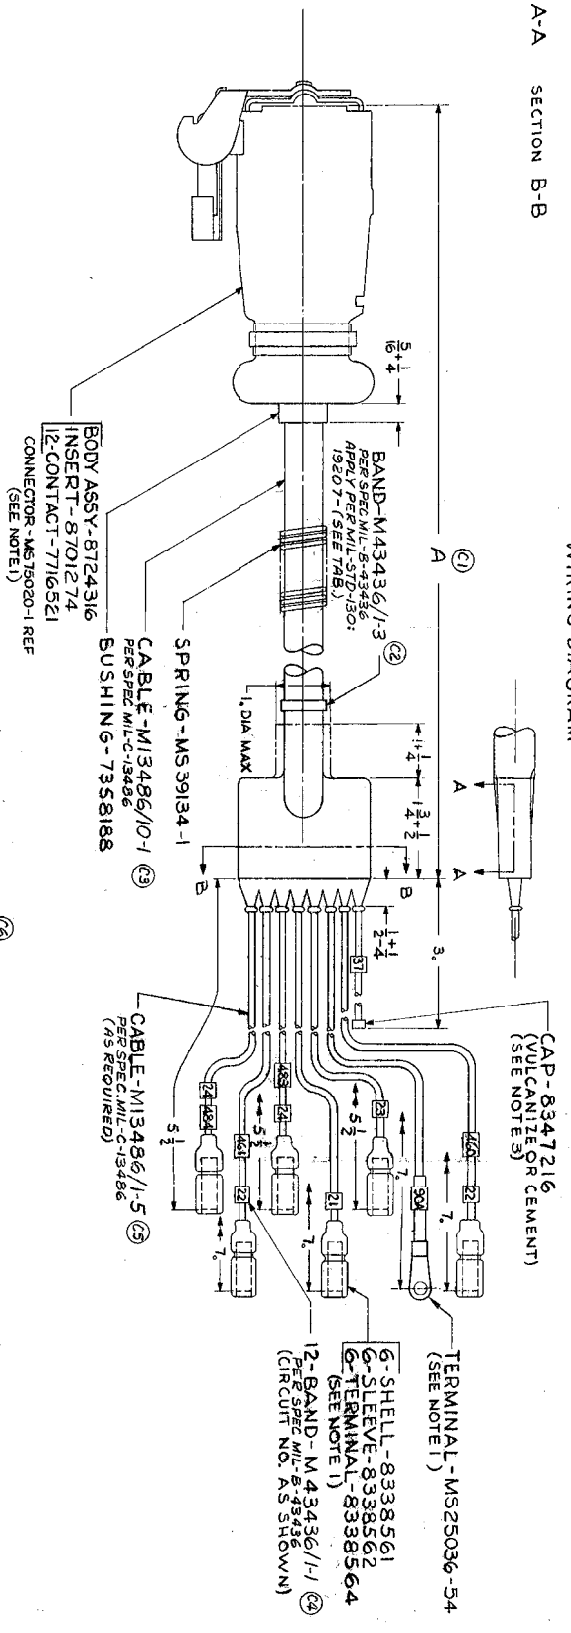

NOTE:  
 1. TO BE ASSEMBLED IN ACCORDANCE WITH  
 PARA 2.3.4.4 OF DWG 6722729  
 2. MUST MEET REQUIREMENTS OF DWG 10911317  
 3. CEMENT USING ADHESIVE  
 TYPE II  
 SPEC MIL-A-5096  
 WHEN OPTIONAL METHOD IS USED

CABLE ASSY NO. 1 A

10891263	70
10891263-1	95

REVISIONS

NO.	REVISION	DATE	BY	CHKD.
1	NOTED			
2	REVISED			
3	SEE REVISION NOTICE			
4	NO. 11-A-5096			
5	NO. 11-A-5096			

ORDNANCE PART NO. SEE TAB.

CODE IDENT. NO. 192207

CABLE ASSY  
 TAILER

ORDNANCE CORPS  
 DEPT OF THE ARMY  
 DETENT ASSEMBL

10891263